

FEP-0812 Version: 3



## 8-Port Fast Ethernet PoE Switch, 4 x RJ45, 4 x RJ45 PoE+, 61.6W

The LevelOne FEP-0812 provides 4 x 10/100Mbps and 4 x 10/100Mbps PoE Plus ports. This switch is IEEE 802.3af/at compliant, and provides power and data over a single Ethernet cable to any PoE device, with total power budget of 61.6W, up to 30W per port. Ideal for desktops and it is also 19-inch rack-mountable, which provides convenient and flexible installation. The FEP-0812 is designed for small businesses that prefer an affordable solution for PoE deploying infrastructure.



1. LED Indicators
2. 10/100Mbps RJ-45 PoE Ports
3. 10/100Mbps RJ-45 Uplink Ports
4. Power Socket

### Key Features

- IEEE 802.3af/at PoE compliant to simplify deployment and installation
- Auto-detection and protection of non-standard PoE devices
- IEEE 802.3x Flow Control protects against lost packets for reliable data transmission
- 10/100Mbps-Full/Half-duplex, Auto-Negotiation, Auto-MDI/MDIX
- 11-inch metal housing with 19-inch rackmount kit included
- Simple Plug and Play installation
- Total PoE power budget: 61.6W, up to 30W per port
-



## Specifications

### System Specifications

#### Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet  
IEEE 802.3u 100-BASE-TX, Fast Ethernet  
IEEE 802.3x Full-duplex Flow Control  
IEEE 802.3af Power over Ethernet (PoE)  
IEEE 802.3at Power over Ethernet Plus (PoE+)

#### Buffer Memory:

64KB

#### Connectors and Cabling:

4 x 10/100Base-TX RJ-45 PoE 1~4 Ports  
4 x 10/100Base-TX RJ-45 Uplink 5~8 Ports

#### Indicator:

Power, Active, 10/100M, PoE

#### Transmission Method:

Store-and-Forward

#### Power:

Power Consumption: < 65W  
Power Input: 100-240V AC, 50-60 Hz, 2A Internal Power Supply

### Features

#### PoE:

Power Budget: Max. 65W  
PoE Standard: IEEE 802.3af/at Power over Ethernet / PSE  
PD classification identity  
PoE over current protection  
PoE circuit sorting protection  
PoE Power Output: Per Port 56V DC, Max. 15.4 watts (IEEE 802.3af) or 30 watts (IEEE 802.3at)  
Power Pin Assignment: 1/2(+), 3/6(-)

### Performance

#### Backplane (Gbps):

1.6Gbps

#### MAC Address Table:

1K

#### Data Transfer Rate:

10/100Mbps

#### Packet Forwarding Rate:

100Mbps port - 148,000pps  
10Mbps port - 14,880pps

### Environment

#### Temperature (°C):

Operating: 0°C ~ 45°C  
Storage: - 40°C ~ 70°C

#### Humidity (Non-condensing):

Storage: 10% ~ 90%  
Operating: 10% ~ 90%

## Physical Specifications

Dimensions (W x D x H mm):

280 x 125 x 44mm

Weight (g):

1130g

## Others


Approval and Compliance:

FCC, CE, RoHS

Deployment:

Desktop and 19-inch rack-mountable

## Diagram

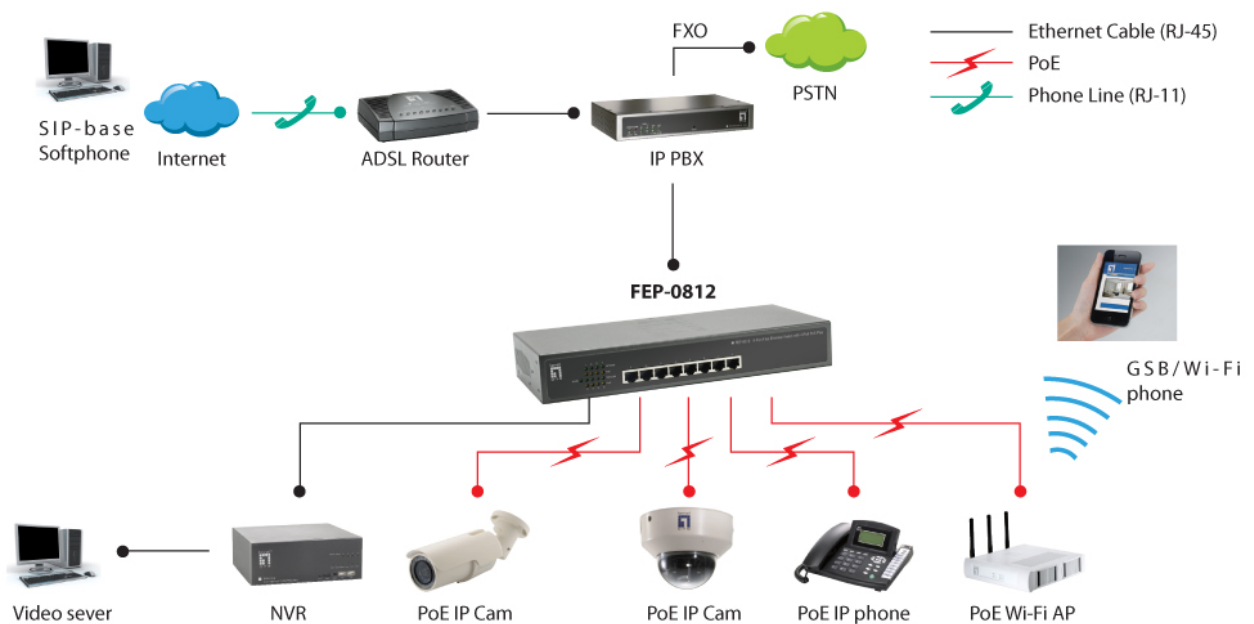

## Order Information

FEP-0812

## Package Contents

FEP-0812

Power Cord

19" Rackmount Kit

Quick Installation Guide

No liability or responsibility for any errors or omissions in the content.  
Specifications are subject to change without notice.  
All mentioned brand names are registered trademarks and property of their owners.  
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.