




GVT-2001 Version: 1

Convertisseur SC 10/100/1000BASE-T vers 1000BASE-SX MMF, 550m

The GVT-2001 MMF SC media converter is able to convert network signals between copper and fiber-optic based networks. The converter provides a 10/100/1000Base-T RJ-45 port, supports full duplex and half duplex switch connectivity and 10Base-T, 100Base-TX and 1000Base-T auto-sensing. Used in multi-mode with fibre-optic cabling, this can extend a network range up to 550m.

The device features built-in Dip switches for easy converter configuration, which function on the Smart LFP (Link Fault Pass-through), allowing the converter to monitor both the fiber and copper ports for signal loss, as well as cut through and smart pass through mode.

The GVT-2001 is able to operate in temperatures from -10° up to 55° Celsius. The converter can be used as a standalone unit or as a slide-in module to the CHV-2000 19" converter rack, which can accommodate up to 14 units for use in a central wiring closet.

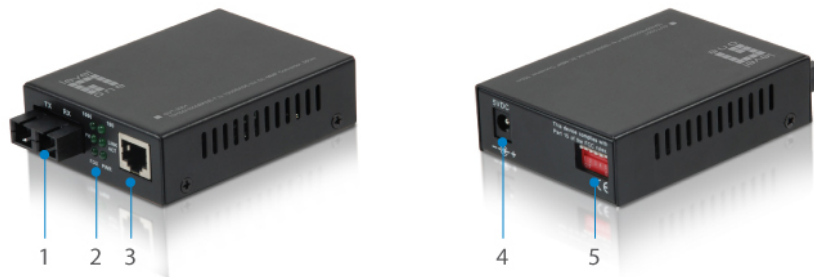

1. 10/100/1000Mbps Fiber Port
2. LED Indicators
3. 10/100/1000Mbps RJ-45 Port

4. DC Power Jack
5. Dip Switch

Key Features

- Transfert de données entre les interfaces 10/100/1000Base-T cuivre et les interfaces fibre
- Fibre multi-mode 1000Base-SX pour lien jusqu'à 550m
- Taux de transfert de trames jumbo de 9K pour augmenter les données
- Technologie LFP (Link Fault Pass-through) (LLCF/LLR) intégrée
- Contrôle de flux IEEE 802.3 x protège contre des paquets perdus pour une transmission fiable des données
- Commutateurs DIP pour une configuration personnalisée
- Prise en charge de la transmission avec faible décalage
- Prise en charge de la transmission de paquets extra-longus jusqu'à 1,6 Ko



- Plage de fonctionnement de -10°C ~ 55°C

Works With



CVH-2000

Châssis de convertisseur de média à 14 fentes



GVT-2000

Convertisseur SFP 10/100/1000BASE-T vers 1000BASE-X

Specifications

System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet
IEEE 802.3u 100-BASE-TX, Fast Ethernet
IEEE 802.3ab 1000BASE-T, Gigabit Ethernet
IEEE 802.3x Flow Control (full-duplex flow control)
IEEE802.3z 1000Base-SX/LX,

Connectors and Cabling:

Fiber Duplex SC (550m);RJ-45 Port CAT-5/5e Twisted Pair
cable Auto MDI/MDI-X (Max to 100m) and Auto-Negotiation

Wavelength(nm):

850nm

Indicator:

PWR,TX (FDX, 100, 1000, Link/Act), FX Link/Act

Transmission Method:

Store and forward (Default)

Power:

DC 5V/2A

Features

General:

DIP Switch 1: LFP function
DIP Switch 2 and 3 performance 4 types work mode
DIP Switch 2 and 3 is OFF = Store and forward
DIP Switch 2 is OFF, 3 is ON = Cut through mode
DIP Switch 2 is ON, 3 is OFF = Smart pass through
DIP Switch 2 and 3 is ON = Pass through mode

Performance

Operating Distance:

550 m

Environment

Temperature (°C):
 Storage: -40 ~75 °C
 Operating: -10 ~ 55 °C
 Humidity (Non-condensing):
 5 ~ 90 %

Physical Specifications


Dimensions (W x D x H mm):
 71 x 94 x 26 mm
 Weight (g):
 420 g

Others

Approval and Compliance:
 CE, RoHS, FCC
 Deployment:
 Desk, chassis mounted

Diagramme

Dimension Diagram

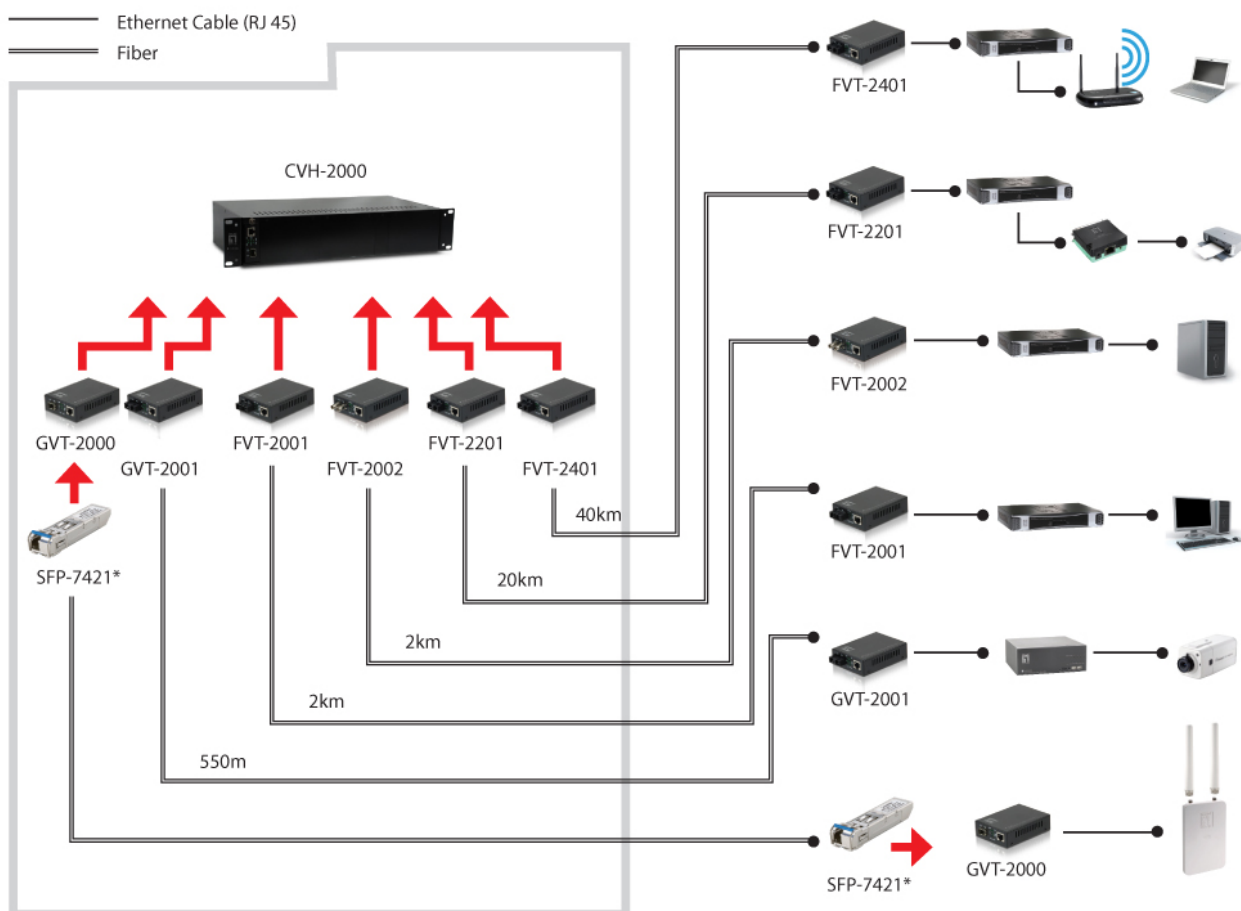

*In above example diagram, converter modules at local and remote ends should be paired for proper connectivity, and the distance mainly depends on cable and transceiver selection accordingly.



Order Information

GVT-2001

Package Contents

GVT-2001

Power Adapter

Quick Installation Guide

Accessoires



CVH-2000

Châssis de convertisseur de média à 14 fentes

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.