




3M™ PBPO/C 6-12

Indoor Distribution Box "Floor Box"

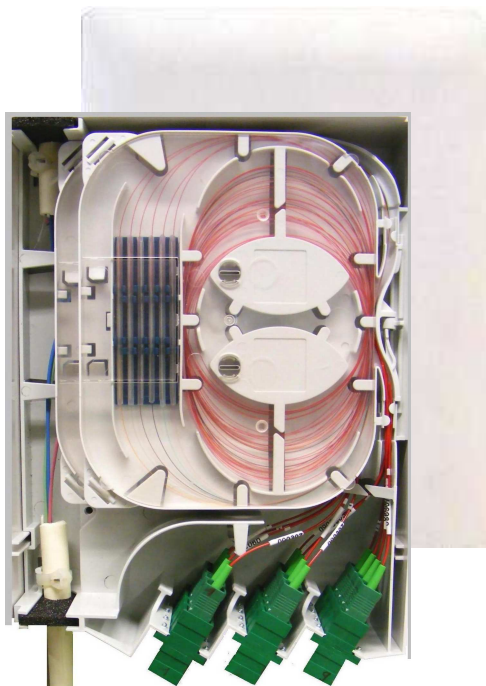

*Distribution Box
PBPO/C 6-12
4 trays 1 Slot
6 Fibriok 2540G
12 drops SC coupling*

Indoor distribution box suitable for connecting between vertical distribution and equipment.

Can be as "end-distribution box" and "window-cut distribution box"

Composition :

- 1 vertical area with two strain reliefs for riser cable
- 1 storage area for cable modules and fibres
- 1 4 slot organiser *BPEO Evolution* type
- 1 to 4 trays for splices or splitters
- Trays for fusion, mechanical splicing and splitters
- Capacity from 12 to 48 splices
- 1 connector panel for 12 SC type couplings

A PBPO version is also available for drop cables.

Features

- Sliding cover
- Cable entries
 - 2 anchoring points for riser cable
- 4 slots organiser *BPEO Evolution* style
- Mechanical or fusion splices
- Capability for splitters
- Large storage area for cable modules or bare fibres
- Re-enterable for the addition of further cables

Benefits

- Adapted to building riser
- Installation for window-cut riser distribution applications
- Fibre management without overtubing
- Combination of many types of trays
- The trays, couplings and pigtailed are available as separate parts

Specification

General product features		Specification			
<ul style="list-style-type: none"> Distribution cable : maximum diameter 13,5 mm Strain relief with 2 ties 4 slot organiser, trays 5 & 10 mm <i>BPEO Evolution</i> range Outlet : 12 pigtails SC/PC or APC in 250 µm or 900 µm and 12 couplings simplex SC/PC or APC The trays, couplings and pigtails are available as accessories 		Degree of protection (EN 60 529)		IP 30 / IK08	
		Installation:		Screws (2 x M4) (not supplied)	
Capacity		Dimensions without fixing supports (in mm)			
<ul style="list-style-type: none"> Fusion Splices 24 6 or 12 per tray Mechanical Splice* 24 6 or 12 per tray Splitter 1 by 8 2 1 splitter and 9 fusion splices per 10 mm tray ("2PAS") 					
		Support		Length	Width
				204	158
		Colour		White	
		Material		Thermoplastic	
* Fibrlok 2540G					

Ordering information

Ref. No.

PBPO/C Internal distribution box

4 slot organiser
Connector plate for 12 SC/PC or SC/APC couplings

N501506A 501506

Trays for Splices

• BPEO-K7-1SLOT -12 fusion

Tray 1 slot depth suitable for fusion splices 45 or 60 mm long
Tray equipped with cover

N541106A 541106

• BPEO-K7-1 SLOT -6 Fibrlok2540G

Tray 1 slot depth suitable for 6 mechanical splices Fibrlok 2540G
Tray equipped with cover

N541103A 541103

• BPEO-K7-2 SLOT -12 Fibrlok2540G

Tray 2 slot depth suitable for 12 mechanical splices Fibrlok 2540G
Tray equipped with cover

N541108A 541108

Trays for Splices & Splitters

BPEO-K7-1 SLOT -9 fusion & PLC splitter

Tray 1 slot depth suitable for 9 fusion splices 45 or 60 mm long
Splitter space: 4x4x6 mm . Tray equipped with cover

In Qualification

BPEO-K7-2 SLOT -12 fusion & splitter

Tray 2 slot depth suitable for 12 fusion splices 45 or 60 mm long
Splitter space: 70x10x6 mm
Tray equipped with cover

N541104A 541104

BPEO-K7-2 SLOT -10 Fibrlok 2540G & splitter

Tray 2 slot depth suitable for 10 mechanical splices
Splitter space: 70x10x6 mm. Tray equipped with cover

N541110A 541110

3M is a trademark of 3M.

Important Notice

Buyer and/or user of this 3M product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing law – to the Terms of Sale of the selling 3M subsidiary.

3M is trademark of the 3M company. SID is a trademark of the Quante AG.



3M Telecommunications

Europe, Middle East & North Africa
3M Deutschland GmbH
Carl-Schurz-Strasse 1 . 41453 Neuss . Germany

Tel: ++49 (0)2131 / 14-5999
Fax: ++49 (0)2131 / 14-5998
Internet: www.3MTelecommunications.com